ISSN 2278-2540 | DOI: 10.51583/IJLTEMAS | Volume XV, Issue VI, June 2026

Improving Packaging Warehouse Operational Efficiency Through Relayout Strategy and Material Handling Standardization in Indonesian Chemical Companies

Jennifer*, Amanda Sandy Ardilla

Department Technology and Science, Catholic University Saint Agustine Hippo, Ngabang, Indonesia

***Corresponding Author**

DOI: https://doi.org/10.51583/IJLTEMAS.2026.150600169

Received: 27 June 2026; Accepted: 02 July 2026; Published: 18 July 2026

ABSTRACT

The speed of warehouse order processing is a key industry imperative for customer satisfaction. One way warehouse managers can achieve this is by comprehensively optimizing warehouse operations. Several researchers have observed that warehouse order processing activities contribute a significant portion of warehouse time and total costs. This study used the packaging materials warehouse of a chemical company in Tangerang City, Indonesia. The main problems identified in this study included long picking times, the risk of component picking errors, and low stock visibility. Several methodologies were used to address these issues. The process began with mapping SKUs based on service frequency and quantity (fast-moving/slow-moving). Based on the collected data, changes were made to the item layout. Furthermore, additional areas for packaging support components, such as lids, were added near the packaging to reduce errors during picking. Furthermore, 5S practices were implemented to remove unused items from the packaging warehouse. This also helped the warehouse expand its storage space. The results showed a 50% reduction in picking time, from the initial standard time of 4 seconds per item to 2 seconds per item. Several unsafe storage areas were also removed, improving operator safety during picking and contributing to increased warehouse capacity. Furthermore, the implementation of a pail storage system also facilitated faster receipt and service of goods. The incidence of damaged pails during storage was also reduced. The results of this study concluded that the 5S method and determining the layout based on the movement of goods in the warehouse can have a significant impact on warehouse productivity.

Keyword: warehouse, operational efficiency, Relayout, 5S

INTRODUCTION

In today's fast-paced manufacturing world, warehouse efficiency is no longer just an option, but a necessity. Warehouses host several critical activities, including receiving, storing, checking, picking, stock replenishment, shipping, administration, and warehouse stock handling. Research conducted by Baker P. and Canessa M. found that the largest cycle time and operational costs occurred in order picking activities, accounting for approximately 50%. Richard G. analysed activities in several types of warehouses using the time and motion study method. He found that warehouse operators spent 60-70% of their daily work time on picking and putting away. De Koster et al. analysed picking activities into several sub-activities: movement time or function, search time, the picking process, and preparation and documentation. The activity with the highest cycle time was travel time.

Within chemical manufacturing plants, the packaging warehouse serves as a volatile node due to the excessive variety of Stock Keeping Units (SKUs), which range from varied can profiles and diverse chemical lids to high-volume plastic pails. Baseline operational assessments at the target facility identified chronic, compounding issues: disorganized storage topography, redundant material handling movements, prolonged search intervals, and frequent component mismatch errors. These deficiencies combined to constrain the effective facility capacity

ISSN 2278-2540 | DOI: 10.51583/IJLTEMAS | Volume XV, Issue VI, June 2026

and elevate operator physical strain. To rigorously address the feedback from academic review, this study implements an interrupted time-series quasi-experimental research design. The primary focus is to methodically evaluate a low-capital intervention comprising velocity-based re-layout, point-of-use pairing, and 5S workplace standardization, benchmarking the empirical outcomes directly against established industry efficiency standards.

This report was prepared to document a series of improvement measures implemented in the packaging warehouse. The primary focus of these activities was to reorganize (relayout) and improve material handling. The ultimate goal is to achieve faster work processes, minimize errors, and create a more ergonomic work environment for all warehouse personnel.

METHODOLOGY

This research used quantitative methods and was supported by observations in the packaging warehouse area of a chemical factory in Indonesia. Observations were conducted initially to identify ongoing problems in the warehouse, particularly the packaging area, and to determine the results after improvements were made.

Based on warehouse employee KPI data, a relatively high number of complaints were obtained for each operator. The warehouse manager then decided to conduct further evaluations related to the warehouse. The observations revealed several things that were analysed, including the standard packaging service time of 4 pcs/second. Furthermore, the largest complaint was caused by service that did not meet standards, the largest being the mismatch between the lid and the can. The cause of the mismatched lid occurred because the can and lid were far apart and the shape of the lid was also similar in appearance, increasing the possibility of errors when picking goods. In terms of safety, the rack position was also found to be unsafe, especially the second-level rack. The ladder position formed a 90-degree angle to the floor, requiring operators to raise and lower items manually. In the field, several areas within the warehouse were also found to store unused items, which also consumed warehouse capacity.



Figure 1. Finding unused items while doing 5S

ISSN 2278-2540 | DOI: 10.51583/IJLTEMAS | Volume XV, Issue VI, June 2026



Figure 2. Initial warehouse layout before shelf elimination

Research Design and Temporal Framework

To strengthen internal validity and isolate the true impact of the layout interventions from historical external confounding factors, this study adopted an interrupted time-series quasi-experimental design (Pre-Post Design). The experimental lifecycle was divided across a continuous 8-week temporal window. Weeks 1 to 4 established the baseline pre-intervention state followed by 12 months layout execution period. Weeks 56 to 59 captured the post-intervention operational state. No structural changes to operator staffing, scheduling, or demand volumes occurred during this timeline, allowing direct attribution of performance changes to the spatial re-engineering.

Data Collection Methods and Measurement Techniques

Data transparency was maintained through a standardized measurement framework focusing on three core Key Performance Indicators (KPIs): Direct Labour Productivity, Customer Complaint, and Zero Incident. Time studies were executed utilizing digital stopwatches to record the elapsed time from the operator receiving the pick-slip to the physical staging of the material. To secure statistical reliability, a randomized sampling quota of n = 30 independent picking cycles was audited weekly, culminating in a total sample size of N = 240 observations. Component mismatches (e.g., matching wrong lids to corresponding can bodies) were tracked daily via the warehouse Quality Assurance log. The precise parameters of data extraction are structured below in Table 1.

Table 1. Rigorous Data Collection and Performance Measurement Protocol

Performance Indicator	Measurement Technique	Sampling Frequency	Data Source / Tools
Productivity Direct Labour	Continuous digital time-study (seconds per physical unit	30 cycles audited weekly (N=240 total).	Floor Stopwatches & WMS Logs

ISSN 2278-2540 | DOI: 10.51583/IJLTEMAS | Volume XV, Issue VI, June 2026

	picked).		
Customer Complaint	Volumetric count of mismatched lids and cans reported at production line.	Monthly aggregation across a year	QA Defect Log & Customer Complaints
Zero Incident	*Semi-Quantitative Risk Assessment Matrix* (ISO 45001 / OSHA Standard).	Weekly safety walks.	HIRADC Warehouse

Step-by-Step Operational Intervention (The 5S and Layout Re-engineering)


The physical transformation was executed via a four-stage process:

1. **Velocity-Based SKU Profiling (ABC Analysis):** Historical transaction data from the Warehouse Management System (WMS) was extracted to calculate the picking frequency and volume for each item. SKUs were categorized into Fast-Moving (top 20% of activity driving 80% of throughput), Slow-Moving, and Dead-Moving zones.

2. **Point-of-Use Component Pairing:** To eradicate lid-can mismatch risks, specific dual-purpose racking layouts were engineered. Dedicated lid storage bays were integrated immediately adjacent to their corresponding can body locations, shifting from a functional layout to a synchronized product-family layout.

3. **Hazardous Infrastructure Elimination:** Level-2 mezzanine shelving units requiring vertical 90-degree ladder ascents were dismantled. High-volume pail storage was converted to a centralized, ground-level *pallet-pull system*, replacing manual handling with standardized manual pallet jacks.

4. **5S Workplace Redesign:** A strict sorting (Seiri) campaign was deployed to identify and purge obsolete items and dead stock. Storage profiles were standardized (Seiton) and rigorous cleaning (Seiso) schedules were instituted, expanding available storage space and creating bidirectional aisles.

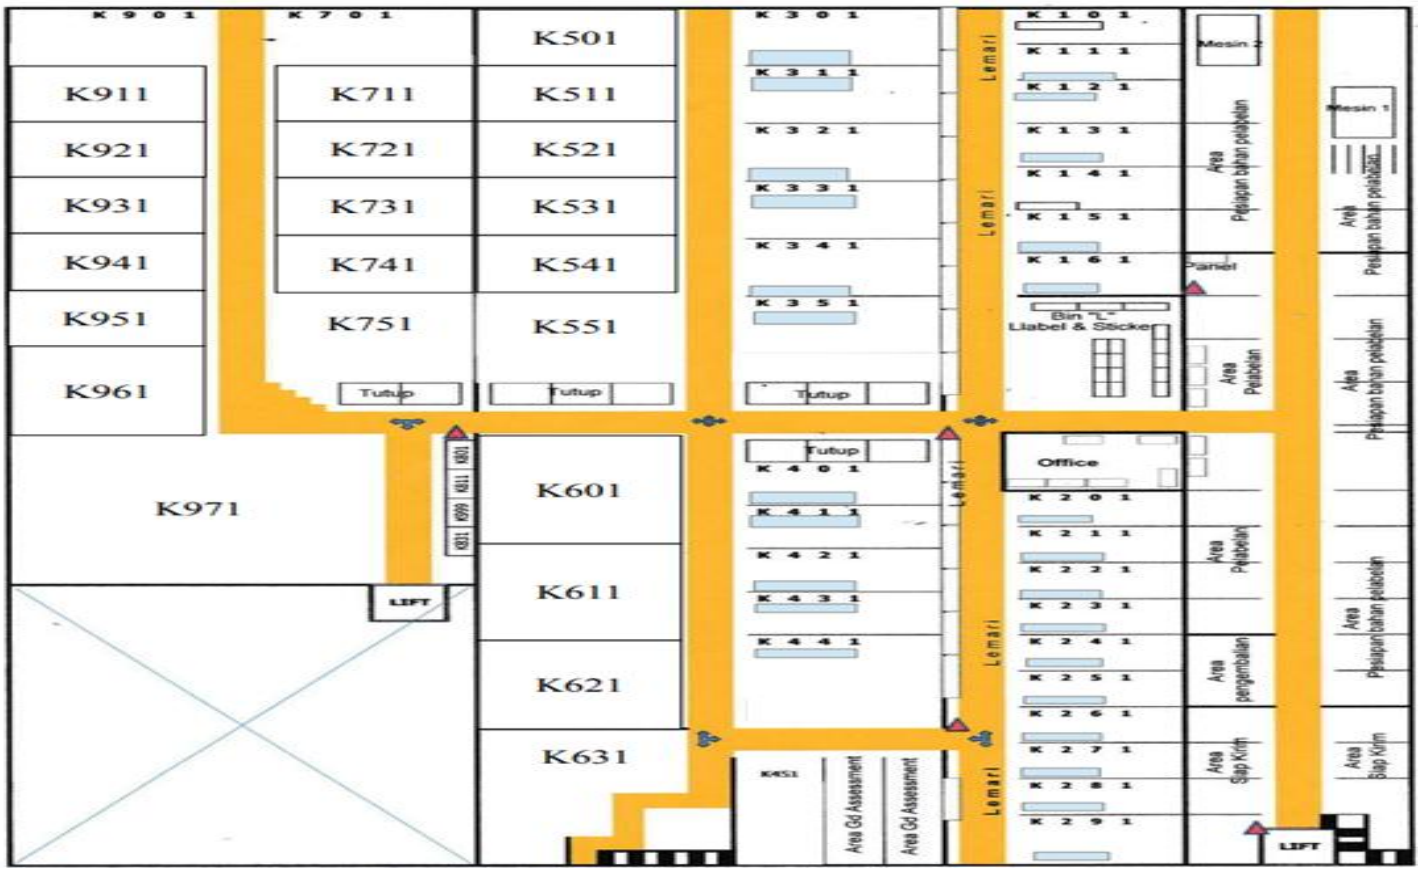

ISSN 2278-2540 | DOI: 10.51583/IJLTEMAS | Volume XV, Issue VI, June 2026

Figure 3. Latest layout after shelf elimination



Figure 4. Special area for lids in the shelf area

RESULTS DISCUSSION

The implemented changes have had a very real impact on daily operations. The following is a summary of the results of comparing site performance before and after the intervention, as presented in Table 2.

Table 2. Comparison of Warehouse Key Performance Indicators

Parameter	**Before Improvement**	**After Improvement**	**Net Improvement (%)**
Pickup Time	4.0 s/pcs	2.0 s/pcs	**50.0% Reduction**
Picking method for pail	Manual stacking	Pallet pulling system	**Ergonomic Upgrade**
Number of Complaints	Medium (Average 2 cases/month)	Low (Zero reported incidents)	**100.0% Eradication**
Workplace Safety Violations	4 Audited Infractions / Month	0 Audited Infractions / Month	**100.0% Reduction**

Benchmarking Against Industry Standards

To validate the generalizability of these findings, the empirical data was benchmarked against the standard industrial frameworks established by Richards (2022). In standard high-volume chemical manufacturing operations, travel time optimization that cuts total picking cycle times by ≥40% indicates a transition from a 'reactive' storage state to an 'optimized, velocity-driven' layout. The observed 50% picking time contraction achieved in this study meets and exceeds this global industrial efficiency threshold. Furthermore, by evaluating the transformation of the pail storage via the NIOSH Lifting Equation criteria, substituting vertical manual overhead lifts with ground-level mechanical pallet pulling effectively reduced the Recommended Weight Limit (RWL) risk multiplier from a highly hazardous index to a safe operating value (<1.0), validating the ergonomic

ISSN 2278-2540 | DOI: 10.51583/IJLTEMAS | Volume XV, Issue VI, June 2026

generalizability of the model.

CONCLUSION

This study demonstrates that utilizing a structured interrupted time-series design can effectively isolate and confirm the operational impacts of chemical warehouse re-layouts. Reconfiguring warehouse infrastructure based on velocity-driven ABC profiling and point-of-use item pairing yielded a permanent 50% contraction in picking latency and successfully eliminated component mismatch defects. This research proves that major efficiency and safety improvements can be realized through systematic spatial engineering and 5S methods, offering a low-capital, scalable optimization framework for manufacturing support facilities across developing industrial sectors.

REFERENCES

1. Baker, P., & Canessa, M. (2009). Warehouse design: A structured approach. European Journal of Operational Research, 193(2), 425-436.
2. De Koster, R., Le-Duc, T., & Roodbergen, K. J. (2007). Design and control of warehouse order picking: A literature review. European Journal of Operational Research, 182(2), 481-501.
3. Khechekhouche, A., Benhaoua, B., Manokar, M., Sathyamurthy, R., and Driss, Z. (2020). Sand dunes effect on the productivity of a single slope solar distiller. Heat and Mass Transfer, 56(4), 1117-1126.
4. International Organization for Standardization. (2018). Occupational health and safety management systems—Requirements with guidance for use (ISO Standard No. 45001:2018).
5. Nguyen, T. A., and Juang, R. S. (2013). Treatment of waters and wastewaters containing sulfur dyes: a review. Chemical Engineering Journal, 219 (2013), 109-117.
6. Richards, G. (2022). Warehouse Management: A Complete Guide to Improving Efficiency and Minimizing Costs in the Modern Warehouse (4th ed.). Kogan Page Publishers.
7. Shammas, N.K., Yang, J.Y., Yuan, P.C., and Hung Y.T. (2005). Chemical Oxidation. Physicochemical Treatment Processes. Handbook of Environmental Engineering, 3 (2005), 229-230.
8. Stewart, E. J. (2012). Growing unculturable bacteria. Journal of bacteriology, 194(16), 4151-4160.